

## RHEOLATE® 212


### Associative Thickener for High Shear-Rate Viscosity Build in Water-Borne Systems

#### GENERAL INFORMATION

**RHEOLATE 212** is a 20 % solids, VOC-free polyether polyurethane associative flow modifier for aqueous applications. It is designed for use in latex paints and other waterborne systems including inks, textile coatings, adhesives and sealants where maintaining viscosity at high shear during product application and improved film levelling are required.

**RHEOLATE 212** can be used alone with small particle size latex systems or in combination with a co-thickener such as RHEOLATE 655 or RHEOLATE 666 if higher mid-shear (package) viscosity is required.

**RHEOLATE 212** has shown more efficient high-shear viscosity development and improved flow and levelling in the newer VOC-free gloss and semi-gloss systems than most other viscosity modifiers.

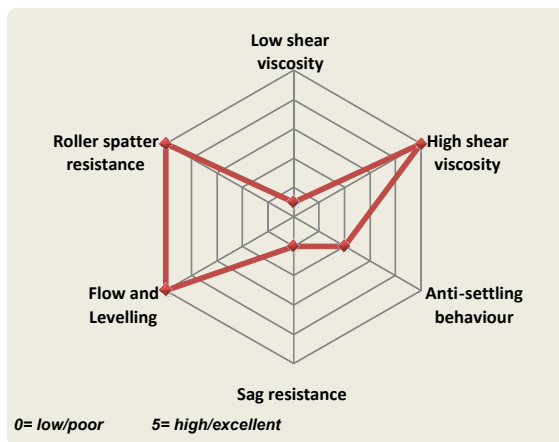

#### CHEMICAL & PHYSICAL PROPERTIES

|                           |  |
|---------------------------|--|
| Appearance                | translucent Off-White to White Liquid              |
| Active solids             | 20 %   |
| Total solids              | 20 %   |
| Brookfield Viscosity, cps | < 6,000 (Brookfield RVT, spindle 4, 20 rpm, 25 °C) |
| Specific Gravity          | 1.03   |
| Solvent                   | water  |

These are typical properties not to be used for specification purposes.

#### APPLICATIONS

- High quality, low VOC latex paints
- High-gloss interior and exterior latex paints
- Semi-gloss interior and exterior latex paints
- Waterborne alkyd latex paints
- Other latex systems requiring high film build and improved flow and levelling
- Inks
- Adhesives
- Textile coatings

#### KEY PROPERTIES

- VOC-free
- Superior spatter resistance
- Good colour acceptance
- Bio-stable
- pH independent
- Pourable liquid for easy addition
- Compatible with other thickeners
- Does not detract from gloss or wet adhesion

#### INCORPORATION

**RHEOLATE 212** can be used as supplied or, if necessary, further diluted with water. Addition can take place at any time during the formulation manufacturing process but incorporation into the millbase before letdown is recommended.

**RHEOLATE 212** additive can be combined with other associative rheological additives, clay based thickeners or cellulosic thickeners for higher package viscosity and improved sag control.

**RHEOLATE 212** is an associative rheological additive and is generally more efficient as the particle size of the latex decreases. This is due to the increased surface area of such latexes. It is important to assess the effectiveness of **RHEOLATE 212** in the complete system, while performance is also affected by other raw ingredients.

*continued...*

## RHEOLATE® 212

### LEVELS OF USE

Typical use levels of **RHEOLATE 212** are 0.5 % to 5 % (thickener solids weight) on total system weight.

### HEALTH AND SAFETY

Before using this product please consult our Safety Data Sheet (SDS) for information on safe handling and storage. The SDS can be found on the company website.

### STORAGE RECOMMENDATIONS

**RHEOLATE 212** should be kept above 4 °C (40 °F). In the event of accidental freezing, thaw gently, spread a portion between glass slides and examine for granules. If found, do not use.

### SHELF LIFE

**RHEOLATE 212** has a shelf life of 2 (two) years from date of manufacture.

### QUALITY ASSURANCE

Since 1992 the company is a holder of the ISO 9001 / ISO 9002 certificates, which guarantees that all operations are conducted according to the stipulated standards.

*NOTE: The information herein is currently believed to be accurate. We do not guarantee its accuracy. Purchasers shall not rely on statements herein when purchasing any products. Purchasers should make their own investigations to determine if such products are suitable for a particular use. The products discussed are sold without warranty, express or implied, including a warranty of merchantability and fitness for use. Purchasers will be subject to a separate agreement which will not incorporate this document.*

© Copyright 2018, Elementis Specialties, Inc. All rights reserved. Copying and/or downloading of this document or information therein for republication is not allowed unless prior written agreement is obtained from Elementis Specialties, Inc.

© Trademark of Elementis Specialties, Inc.

V01 Aug. 2018

#### North America

Elementis  
469 Old Trenton Road  
East Windsor  
NJ 08512, USA  
Tel.: +1 609 443 2500  
Fax: +1 609 443 2422

#### Europe

Elementis UK Ltd.  
c/o Elementis GmbH  
Stolberger Strasse 370  
50933 Cologne, Germany  
Tel.: +49 221 2923 2066  
Fax: +49 221 2923 2011

#### Asia

Deuchem (Shanghai) Chemical Co., Ltd.  
99, Lianyang Road  
Songjiang Industrial Zone  
Shanghai, China 201613  
Tel.: +86 21 5774 0348  
Fax: +86 21 5774 3563